

# VaultIC292

With pre-provisioned DAC (Matter Certificate)

Ready-to-use Secure Authenticator for Matter compliant devices. Embeds a unique digital identity signed by WISeKey PAA, a CSA accredited Root Certificate Authority



**Tamper Resistant**



**Easy Integration**



**Pre-Provisioned**



**Small Footprint**



## Matter Ready

VaultIC292 can be pre-configured with the Device Attestation Certificate (DAC), the Product Attestation Intermediate (PAI) Certificate, the passcode verifiers and related material.



## Cloud Ready

VaultIC292 can be pre-configured with private keys & X509 Certificates to be used for AWS and Azure Cloud commissioning.




Explore our Solutions  
for Matter



Visit VaultIC292  
Product Page

## Block Diagram VaultIC292

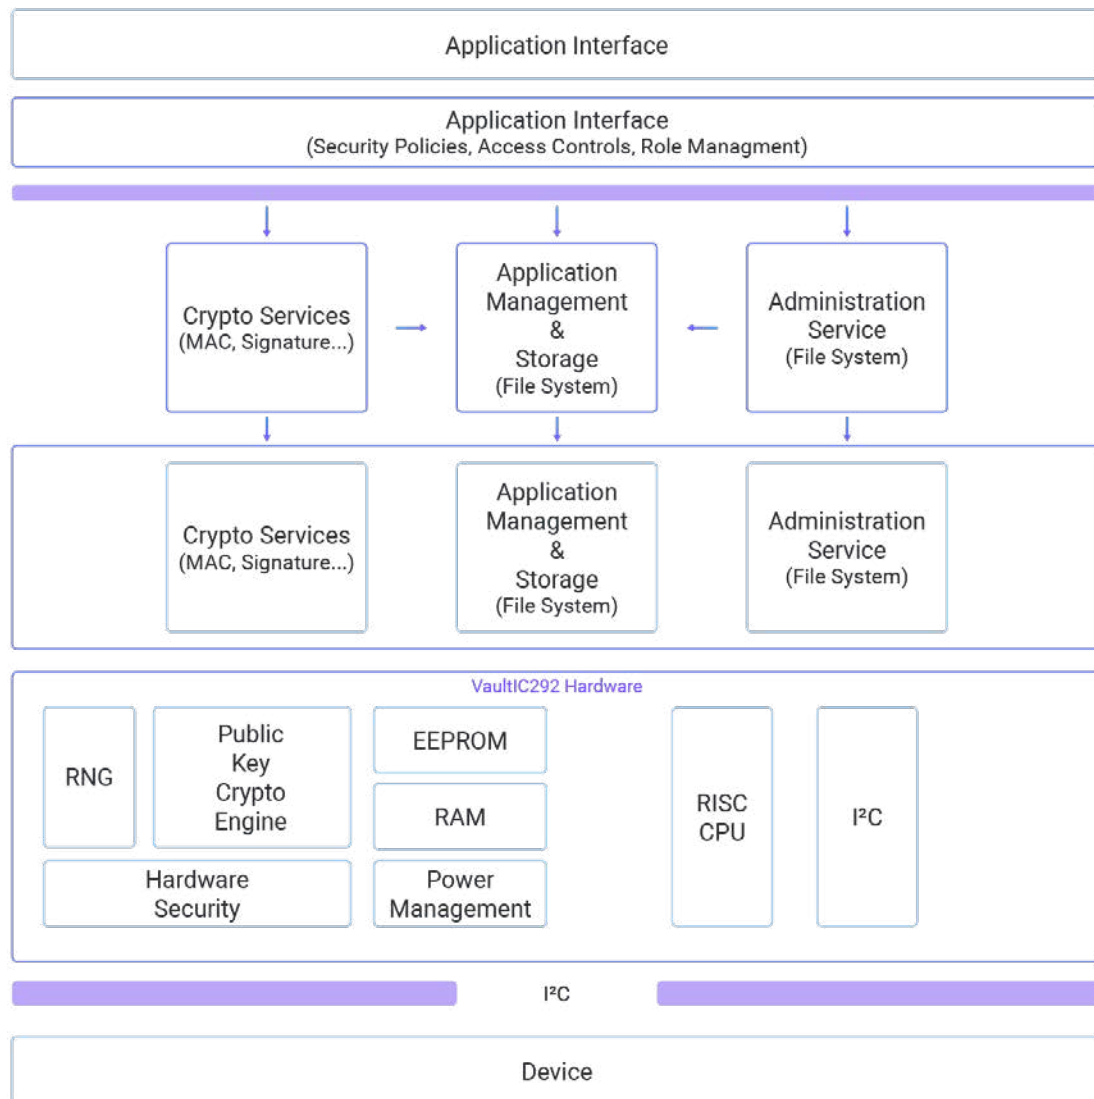

## Technical Features

### Cryptographic Services:

- Key pair generation
- Digital signature (ECDSA) P-256
- Shared secret generation (ECDH)
- True Random Number Generation
- Stores up to 5 static key pairs and 3 ephemeral key pairs

### Certifications / Standards:

- Hardware: CCEAL5+ ready
- True RNG: NIST SP 800-90A, NIST SP 800-90B
- ECDSA: FIPS 186-4
- ECC Parameters: NIST SP 800-186

### Hardware Platform:

- Hardware 16-bit Public Key Crypto Accelerator
- Power consumption: 64µA in standby mode and 3mA to 5mA during CPU-intensive operations
- Operating temperature : -40°C to +105°C
- Operating range: 1.62V to 5.5V
- I<sup>2</sup>C
- UDFN-8 (RoHS compliant) 2mm x 3mm
- DFN-6 (RoHS compliant) 2mm x 3mm

### Trust Services

- Secure Data (keys, X509 certs, etc) Provisioning on wafer or on package : Vaultitrust
- X509 Device Identity Management (managed PKI) : INeS